

FLUSHBOLTS

FL-1002 - Standard Flushbolt, 1/8" offset for use on a non-weatherstripped door stile. Standard 5/8" throw when activated.

FL-1004 - Standard Flushbolt, 1/4" offset for use on a weatherstripped door stile. Standard 5/8" throw when activated.

FL-1006 - Standard Flushbolt. 3/16" offset for special application as required. Standard 5/8" throw when activated.


FL-2002 - Optional Flushbolt, 1/8" offset for use on a non-weatherstripped door stile. Optional 7/8" throw when activated.

FL-2004 - Optional Flushbolt, 1/4" offset for use on a weatherstripped door stile. Optional 7/8" throw when activated.

FL-3001 - Special Kawneer Type Flushbolt, 1/8" offset for use on a non-weatherstripped door stile. No flushbolt guide.

- Radius Flushbolt face measuring 15/16" x 4-1/4".
- Positive "U" joint actuator for secure locking.
- Flushbolt rod length for 12" Centerline of face installation.
- Square nylon rod tip with beveled corners, fits in 1/2" square hole.
- Inside FG-1000 standard Flushbolt guide and screws.
- Finishes Available:
 - AL - Baked Satin Aluminum Paint
 - BK - Baked Black Paint
 - DU - Baked Storefront Bronze Paint

**FL-1000/2000
Type**

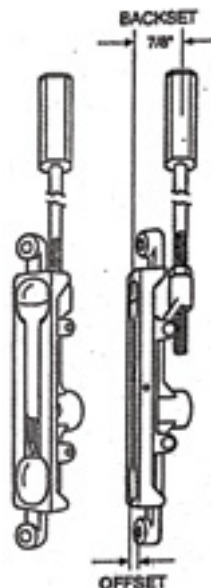

**FL-3001
Type**

