


## ≡ SECURITRON QUICK TIP ≡

**QUICK TIP NUMBER:** QT-DK-16/26-2

**PRODUCT:** DK-16 or DK-26 Series Digital Keypads

**DESCRIPTION:** It is possible to use the Digital Keypad's Hard Code function to provide manual building opening and closing at this door. This will allow the customer to unlock the door (during business hours for example) and then relock it manually (at close of business for example). This is called a "Toggle Mode". Once the door is relocked the standard User Codes will allow standard after hours entry.

If you intend to use this application you will need to verify that the lock is rated for continuous duty. The first thing that you must do is wire the Digital Keypad as shown below. You will then need to program at least one User Code and the Hard Code. While in the Program Mode you will also need to press in code **75**. Code 75 will activate the Hard Code Toggle function. Please note that the Door Bell Function or any other function involving the programmable relay will not be available once this function is programmed.

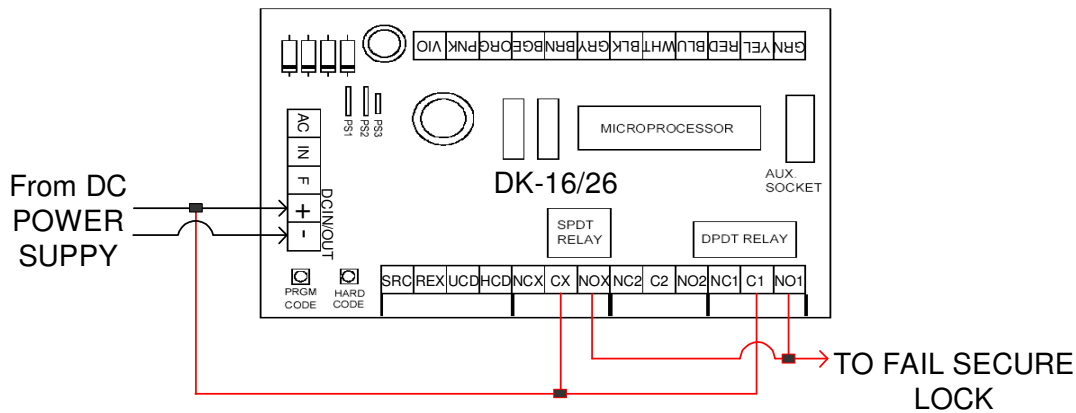

### Wiring a DK-16 or DK-26 for HARD CODE Openings & Closings (with a Fail Secure Lock)



ASSA ABLOY, the global leader  
in door opening solutions

Securtron Magnalock Corporation  
10027 S. 51<sup>st</sup> Street, Ste 102  
Phoenix, AZ 85044

Tel 800.624.5625  
Fax 888.624.5625  
customer care@assaabloyems.com  
www.securitron.com