




# Double Cylinder Latchhead Assembly Installation Instructions

For use with Mortise 7130 Series Double Cylinder Exit Device

1. Install Mortise lock and Outside Trim onto door using supplied Instructions.
2. Using slotted screwdriver in the slot of the "Mortise Double Cylinder Adapter" Thread Clockwise into Mortise Lock until "Mortise Double Cylinder Adapter" bottoms out on opposing lock.
3. Un-thread "Mortise Double Cylinder Adapter" Counter Clockwise one full turn and orientate as shown in Figure 1.
4. Tighten Cylinder Locking Screw through Mortise Lock Front
5. Mount Exit Device using supplied instructions #80-9470-0030.
6. Assemble Cylinder, Cylinder Collar and Cylinder Housing to Exit Device Cover as shown in Figure 1. Rotate Cylinder Housing until it's mounting holes align with the mounting holes for the Cylinder and install the two Cylinder Housing Mounting Screws.
7. Install Exit Device Cover onto door over Exit Device being sure to align the Cylinder's tailpiece with the slot in the "Mortise Double Cylinder Adapter". Align the holes of the Exit Device Cover and install Device Cover Screws.
8. Test operation of both cylinders to be certain they function properly. Adjust as needed.

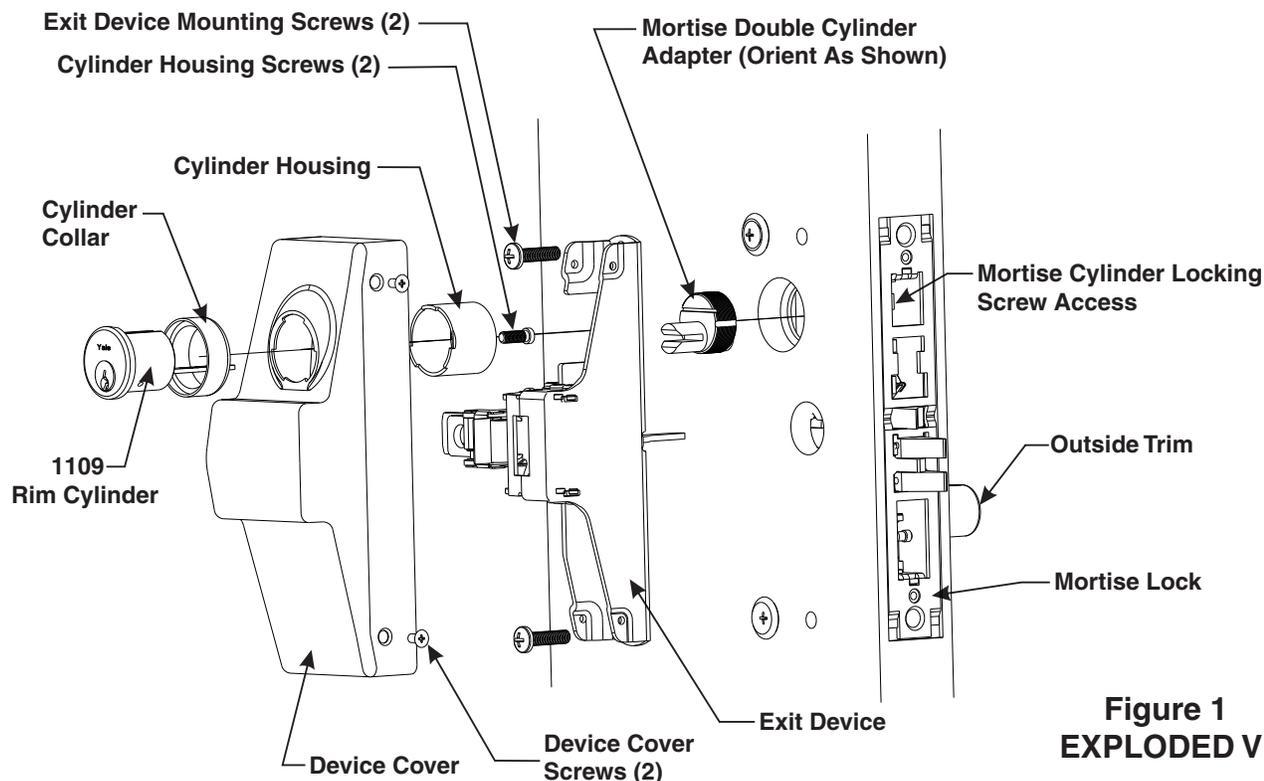

## Yale Locks & Hardware

100 Yale Avenue, Lenoir City, TN 37771 • Product Support Tel 800.438.1951 • Fax 800.338.0965 • [www.yalelocks.com](http://www.yalelocks.com)

Yale Locks & Hardware is a division of Yale Security Inc., an ASSA ABLOY Group company.

Yale® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company. Other products' brand names may be trademarks or registered trademarks of their respective owners and are mentioned for reference purposes only. These materials are protected under U.S. copyright laws. All contents current at time of publication. Yale Security Inc. reserves the right to change availability of any item in this catalog, its design, construction, and/or its materials.

Copyright © 2006, 2012, Yale Security Inc., an ASSA ABLOY Group company.

All rights reserved. Reproduction in whole or in part without the express written permission of Yale Security Inc. is prohibited.

Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Yale Locks & Hardware makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

